

5820L

DOOR/WINDOW CONTACT TRANSMITTER



Honeywell's 5820L Slimline Door/Window Contact Transmitter is nearly half the size of standard door/window transmitters. It is ideal for casement and double-hung windows. The 5820 provides a single zone of protection, and installs easily on doors or windows with the included mounting hardware or double-sided adhesive tape.

FEATURES

- Sleek design is nearly half the size of competitors
- Easy-to-open case requires no special tools
- Case tamper protection (front and back)
- Ideal for double-hung windows
- Easy replaceable AAA Lithium battery

SPECIFICATIONS

Dimensions

- 3.0" H x 0.5" W x 0.8" D
- (76.2mm) x (12.7mm) x (20.3mm)

Power Source

- 1.5VDC, AAA Lithium battery (supplied)
- 1.5VDC, AAA Alkaline battery

Gap

- 0.5" (12.7mm) max distance

Case Tamper Protection

- Front and back case tamper

Operating Temperature

- 32° F to 122° F (0° C to 50° C) non-condensing

Transmit Frequency


- 345 MHz

Compatibility

- Compatible with all 5800 Series Wireless devices

Agency Listings

- FCC
- IC
- cULus

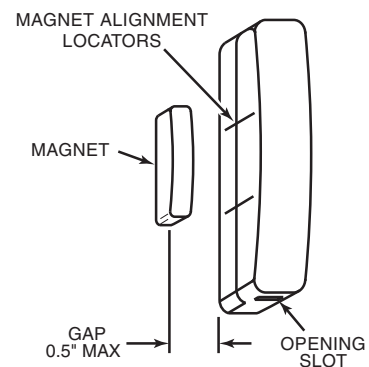

ORDERING

5820L

Slimline Door/Window Contact Transmitter supplied with Lithium battery

Automation and Control Solutions

Honeywell Security & Communications
2 Corporate Center Dr. Suite 100
P.O. Box 9040
Melville, NY 11747
www.honeywell.com

L/5820TRANS/D
September 2008
© 2008 Honeywell International Inc.