

Installation Guide

Overview:

RB1224 Relay Module can be utilized in many different applications such as: Dry Contact, Line Seizure, Polarity Reversal, Latching Dry Contact, and much more.

Specifications:


- 12VDC or 24VDC selectable operation.
- Turn SW1 OFF for 24VDC operation. Turn SW1 ON for 12VDC operation.
- Current draws: 75mA.
- 5A/220VAC or 28VDC DPDT contacts.
- DIN Rail mountable (order part # CLIP4).
- Board Dimensions (L x W x H, approximate): 2.75" x 2" x 1" (69.8mm x 50.8mm x 25.4mm)

SW1 DIP Switch




Operations:


Dry Contacts

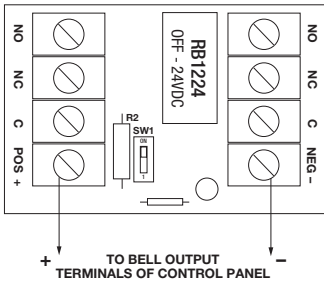

Polarity Reversal

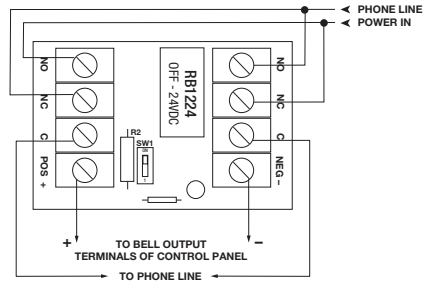

Latching Dry Contacts

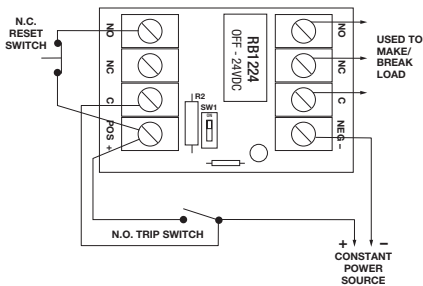

Line Seizure

