
Are there additional mounting brackets for the ADC-VDB755P?

Yes. Additional mounting brackets for the ADC-VDB755P include:

- Wedge Mount Kit (ADC-VDBA-755P-WMK) that includes two additional wedge types
- Flush Mount Kit (ADC-VDBA-755P-FMK) to enable clean, in-wall installations
- Decorative Plates for the Alarm.com PoE Video Door Station (ADC-VDBA-755P-COVER) transforms a functional installation into a polished, professional look
- Single-gang Mounting Plate Kit (ADC-VDBA-755P-MNT) acts as a junction box to contain wiring

Wedge Mount Kit (ADC-VDBA-755P-WMK)


The additional wedges in the Wedge Mount Kit allow the user to achieve more extreme left/right pans for installation on walls perpendicular to the door. It also adds different options for tilt combined with left/right pan to allow for expanded vFoV to the ground, minimizing the blind spot at the bottom of the field of view to capture smaller packages.

Bracket name	Angle	Bracket image
A*	5° tilt down	

Bracket name	Angle	Bracket image
B	15° left or right	

***Important:** The correct wedge type must be selected after installing the downward tilt mounting bracket. For more information about how to choose the wedge type, see [Enable the wedge setting for the ADC-VDB755P](#).

Flush Mount Kit (ADC-VDBA-755P-FMK)

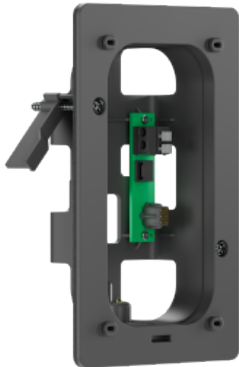Mount Kit accessory	Dimensions	Mount Kit accessory image
Flush Mount wall box	Recommended wall cutout: 3.2" x 4.8"	
Flush Mount front faceplate	6.2" x 4.2"	

Decorative Plate for the Alarm.com PoE Video Door Station (ADC-VDBA-755P-COVER)

Important: The Decorative Plate cover additionally requires the Flush Mount Kit (ADC-VDBA-755P-FMK) for installation.

**Decorative Plate color variants
(SKUs)**

Dimensions

Decorative Plate image

- Dark Grey (ADC-VDBA-755P-COVER-DG)
- Silver (ADC-VDBA-755P-COVER-S)

7.87" x 5.91"



Single-gang Mounting Plate Kit (ADC-VDBA-755P-MNT)

Mount Kit accessory	Angle	Bracket image
Flat adapter backplate	0°	

Mount Kit accessory

Angle

Bracket image

Wall plate cover


-



Screw usage guide included in the ADC-VDBA-755P-MNT kit:

The ADC-VDBA-755P-MNT includes a flat adapter that can be used for installations where the single-gang box is installed in a way that requires the adapter for the ADC-VDB755P to be installed flush with the wall plate.

Note: Only one screw set, A or B, needs to be used; two different lengths are provided for the installer's preference. Screw sets C and D are optional only if the installer wants to install the wedge or flat adapter on top of the wall plate.

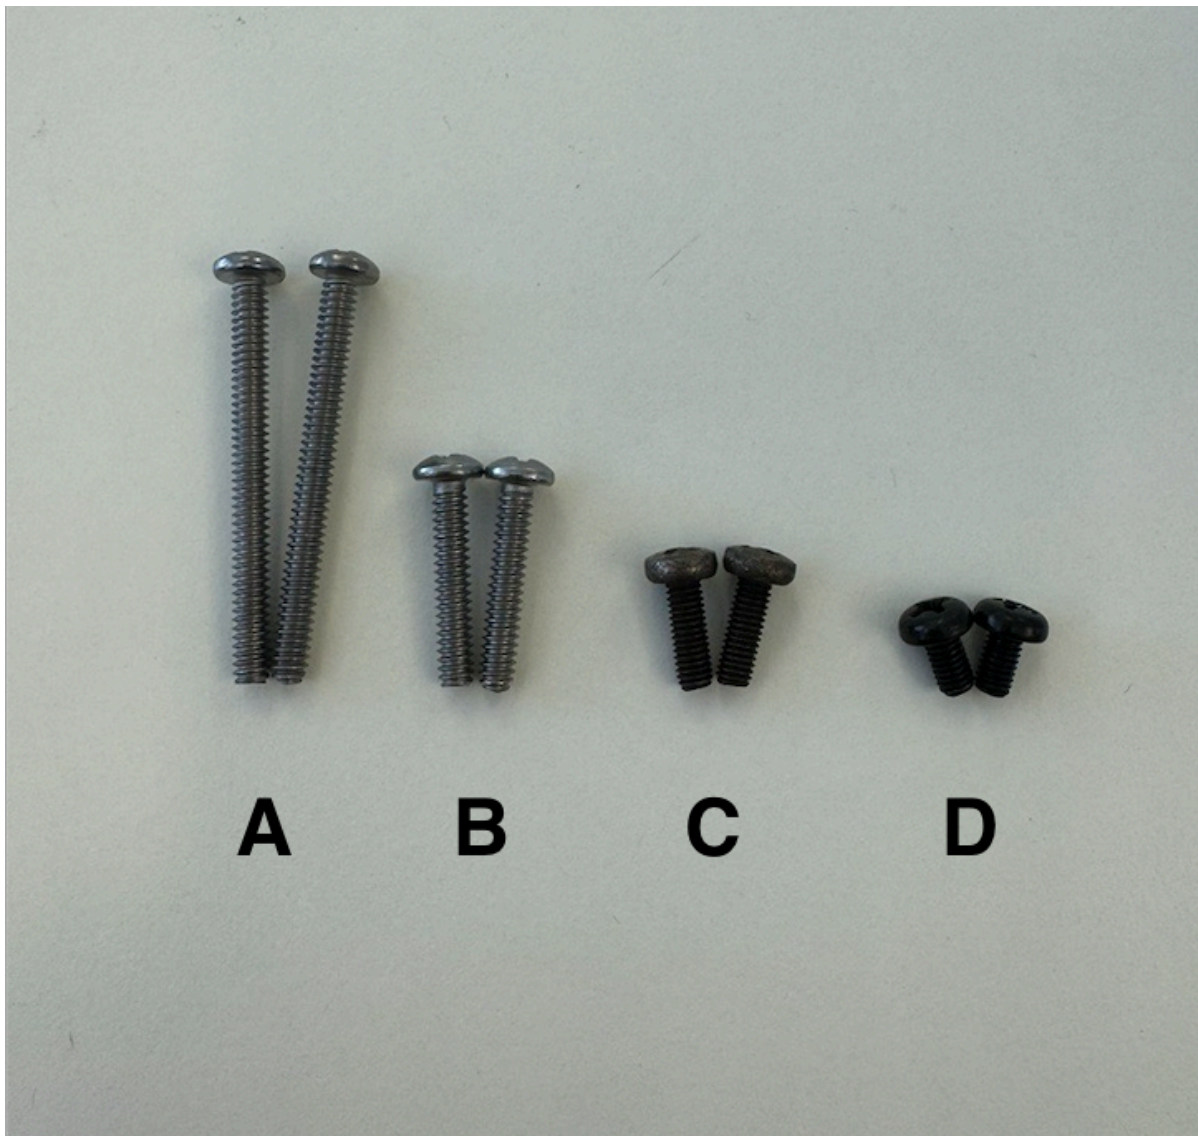

Screw set A:

- Screw size: 6-32 x 1.5"
- Standard Installation: Use to screw the VDB755P and wall plate to the junction box.
- Wedge or Flat Adapter Installation: Use to screw the wall plate to the junction box.

Screw set B:

- Screw size: 6-32 x .75"
- Standard Installation: Use to screw the VDB755P and wall plate to the junction box.
- Wedge or Flat Adapter Installation: Use to screw the wall plate to the junction box.

Screw set C (optional):

- Screw size: 3.5mm x 10mm
- Wedge or Flat Adapter Installation: Use to screw the wedge or flat adapter to the wall plate using the diagonally oriented threaded inserts.

Screw set D (optional):

- Screw size: 3.5mm x 6mm
- Wedge or Flat Adapter Installation: Use to screw the VDB755P to the wedge or flat adapter.